

Distance mounting system

ResiTHERM® 16

Advantages



- The perfect solution for mounting heavy loads on insulated facades without thermal bridges
- Suitable for concrete, aerated concrete and masonry made of perforated and solid bricks
- Wide range of applications, such as awnings, canopies, french. balconies, satellite dishes, air conditioners, etc.
- High application flexibility: One set for all insulation types and thicknesses from 60-300 mm in concrete and 60-250 mm in perforated bricks.
- Time and cost savings due to simple and quick installation
- Reliable, durable, ETA-tested fixing
- Thermal separation module eliminates heat bridges efficiently and protects against mould and heat loss
- Pre-assembled, weather resistant EPDM sealing ensures safe sealing against driving rain up to wind force 11 (violent storm) and up to 3 mm displacement, tested according to DIN EN 12155
- No risk of corrosion due to high-quality materials such as stainless steel A4 and glass-fibre reinforced nylon
- Possibility of subsequent adjustment of the screw-in depth of the M12 threaded stud as well as the M16 threaded rod

Suitable building materials

Very suitable



- Concrete
- Solid brick
- Solid sand-lime brick
- Lightweight solid concrete blocks
- Aerated concrete



- Hollow brick
- Hollow sand-lime brick
- Lightweight hollow concrete blocks
- Natural stone (risk of discolouration)



Approvals and certificates




European Technical Assessment
Distance mounting system RTH 16
for concrete and masonry




Tested for driving rain tightness by
the Prüfzentrum für Bauelemente

Mounting

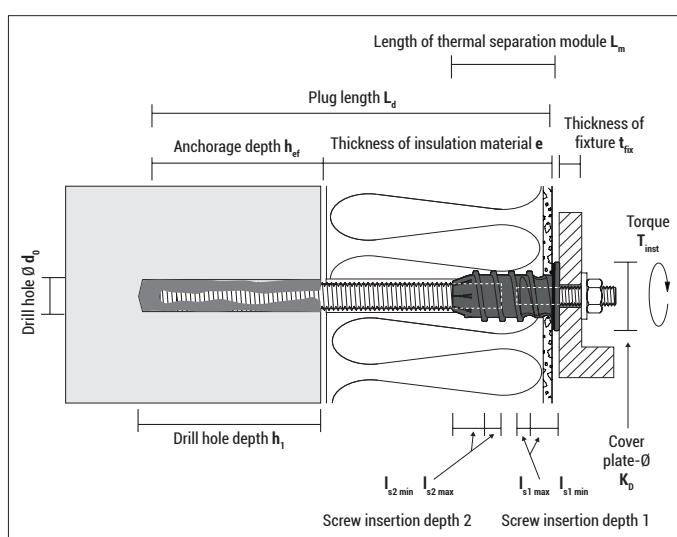


Mounting in concrete

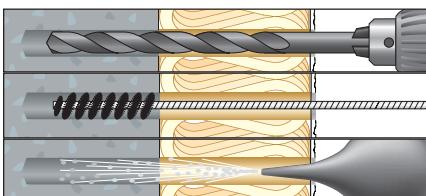

1. Drill a hole: Drill hole diameter = 18 mm


Concrete: Drill hole depth \geq 90 mm + insulation thickness (incl. plaster) **Solid brick:** Drill hole depth \geq 110 mm + insulation thickness (incl. plaster)

2. Clean the drill hole properly according to ETA:
4x blow - 4x brush - 4x blow

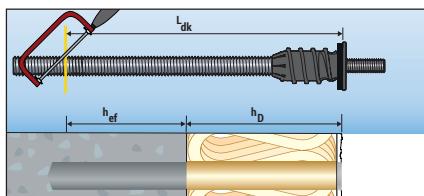


3. Cut the ResiTHERM® 16 to length:

After determining the correct length, cut the threaded rod M16 to length with a metal saw or similar.

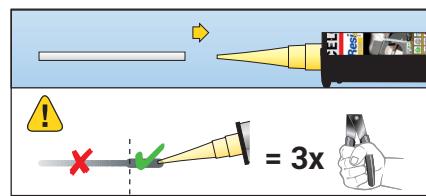


4. Attach the mixing nozzle extension MDV to the mixing nozzle MD.

Squeeze out the injection mortar until the mortar has a uniform grey mixing colour - discard the pre-run of the first at least 3 strokes.

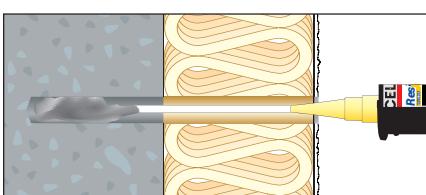


5. Fill at least 2/3 of the drill hole with composite mortar (start from the beginning). For number of strokes see mounting instructions at www.celofixings.com.

Important: Follow the installation instructions and processing time of the ResiFIX injection mortar used in accordance with the approval/assessment.

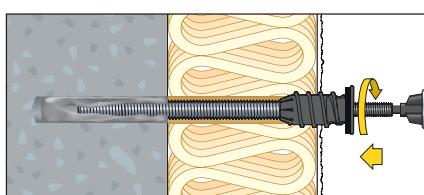

6. Screw in the ResiTHERM® 16 with the hexagon bit (included) and a cordless screwdriver until the seal is pressed against the plaster.


Note: The thermal separation module drills itself through the insulation (additional sealing is not necessary, unless the plaster is very rough)

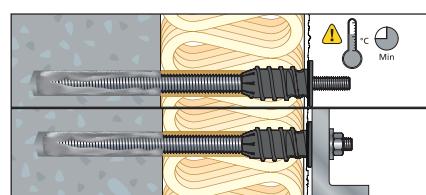

7. Observe curing time of the injection system, see cartridge label of the ResiFIX injection mortar.

8. Afterwards, the attachment can be mounted (max. torque $T_{inst} = 19 \text{ Nm}$).

Montage in masonry (hollow brick)

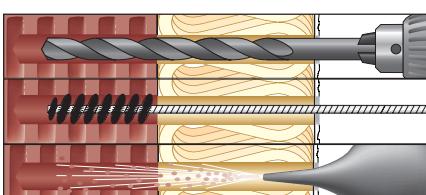


1. Drill a hole: Drill hole diameter = 20 mm.

Drill hole depth \geq 140 mm + insulation thickness (incl. plaster). Observe the drilling procedure of the approval/assessment of ResiFIX injection mortar.


Perforated bricks and aerated concrete: Rotary drilling - without impact

2. Clean the drill hole properly according to ETA:
2x blow - 2x brush - 2x blow

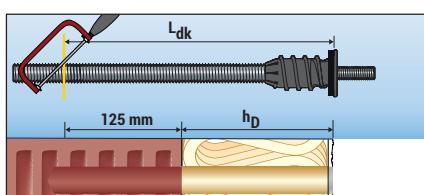


3. Cut the ResiTHERM® 16 to length:

Correct length L_{dk} : Anchorage depth in plastic sleeve (125 mm) + insulation thickness e (incl. plaster)
After determining the correct length, cut the threaded rod M16 to length with a metal saw or similar.

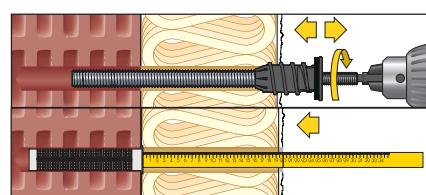


4. Enlarge the opening in the plaster for the collar of the plastic sleeve to 26 mm. To do this, briefly screw the thermal separation module in and out through the plaster for only approx. 2 thread turns or ream the plaster with a drill or drill with a bigger 26 mm drill.

5. Push the plastic sleeve into the drill hole with the help of a folding ruler or similar.

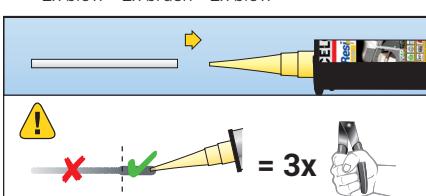

6. Attach the mixing nozzle extension MDV to the mixing nozzle MD.

Squeeze out the injection mortar until the mortar has a uniform grey mixing colour - discard the pre-run of the first at least 3 strokes.

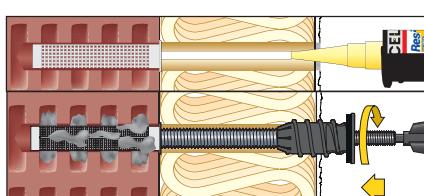


7. Fill the plastic sleeve completely with composite mortar (start from the beginning). For number of strokes see mounting instructions at www.celofixings.com

Important: Follow the installation instructions and processing time of the ResiFIX injection mortar used in accordance with the approval/assessment.

8. Screw in the ResiTHERM® 16 with the hexagon bit (included) and a cordless screwdriver until the seal is pressed against the plaster.

Note: The thermal separation module drills itself through the insulation (additional sealing is not necessary, unless the plaster is very rough)

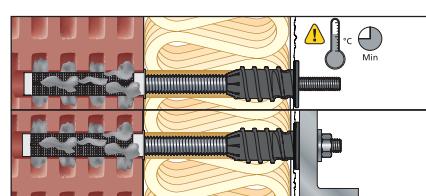

9. Observe curing time of the injection system, see cartridge label of the ResiFIX injection mortar.

10. Afterwards, the attachment can be mounted (max. torque $T_{inst} = 19 \text{ Nm}$).

ResiTHERM 16® Sets



ResiTHERM® 8.8 16/250 M12

Type	Art-No	Content Set (preassembled)	Length L [mm]	Connection thread	Thickness of insula- tion e [mm]		€ / set	[set]	[sets]
Set ResiTHERM® 8.8 16/250 M12, 2 pieces	9250RTH162	2x ResiTHERM® 16, thermal separation module M16 / M12 2x Threaded rod M16x350, DIN 976, zinc plated, steel quality 8.8 2x Threaded stud M12x70, DIN 913, A4 2x Hexagon nut M12, DIN 934, A4 2x Washer M12, DIN 125, A4 1x Hexagon socket bit, 1/4 Inch, size 6 1x Mixing nozzle extension 245 mm 2x Plastic sleeve SH 20x130 mm 1x Instruction manual ResiTHERM® 16	430	M12	Concrete: 60 - 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250		1	8	
Set ResiTHERM® 8.8 16/250 M12, 20 pieces	9250RTH1620	20x ResiTHERM® 16, thermal separation module M16 / M12 20x Threaded rod M16x350, DIN 976, zinc plated, steel quality 8.8 20x Threaded stud M12x70, DIN 913, A4 20x Hexagon nut M12, DIN 934, A4 20x Washer M12, DIN 125, A4 1x Hexagon socket bit, 1/4 Inch, size 6 8x Mixing nozzle extension 245 mm 20x Plastic sleeve SH 20x130 mm 4x Instruction manual ResiTHERM® 16	430	M12	Concrete: 60 - 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250		1	-	



ResiTHERM® A4 16/250 M12

Type	Art-No	Content Set (preassembled)	Length L [mm]	Connection thread	Thickness of insula- tion e [mm]		€ / set	[set]	[sets]
Set ResiTHERM® A4 16/250 M12, 2 pieces	9X250RTH162	2x ResiTHERM® 16, thermal separation module M16 / M12 2x Threaded rod M16x350, DIN 976, stainless steel A4 2x Threaded stud M12x70, DIN 913, A4 2x Hexagon nut M12, DIN 934, A4 2x Washer M12, DIN 125, A4 1x Hexagon socket bit, 1/4 Inch, size 6 1x Mixing nozzle extension 245 mm 2x Plastic sleeve SH 20x130 mm 1x Instruction manual ResiTHERM® 16	430	M12	Concrete: 60 - 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250		1	8	
Set ResiTHERM® A4 16/250 M12, 20 pieces	9X250RTH1620	20x ResiTHERM® 16, thermal separation module M16 / M12 20x Threaded rod M16x350, DIN 976, stainless steel A4 20x Threaded stud M12x70, DIN 913, A4 20x Hexagon nut M12, DIN 934 A4 20x Washer M12, DIN 125, A4 1x Hexagon socket bit, 1/4 Inch, size 6 8x Mixing nozzle extension 245 mm 20x Plastic sleeve SH 20x130 mm 4x Instruction manual ResiTHERM® 16	430	M12	Concrete: 60 - 300 Solid brick, Aerated concrete: 60 - 280 Hollow brick: 60 - 250		1	-	



ResiTHERM® 16 accessories



Two-hole nut driver DIN 3116C for adjusting ResiTHERM® 16

Type	Art-No	Length L [mm]	Width W [mm]	Sheet thick- ness t _m [mm]	Suitable for	€ / 100 pcs	[pcs]	[pcs]
Two-hole nut driver	155253AMT	155	25	3	ResiTHERM® 16	1	15	



Threaded stud adapter M12/M10, stainless steel A4 incl M10 nut and washer

Type	Art-No	Length L [mm]	Suitable for	€ / 1 pc	[pcs]	[pcs]
Threaded stud adapter	X70M12M10ECT4	70	ResiTHERM® 16	4	60	



Vinylester VYSF [styrene free]

Type	Art-No	Content [ml]	Mixing nozzles included [pcs]	Shelf life [months]	ETA	€ / pc	[pcs]
VY 300 SF	300VSF	280	2	18	●	12	
VY 345 SF	345VSF	345	2	18	●	12	
VY 410 SF	410VYSF	410	1	18	●	12	



Vinylester VY ECO SF [styrolfrei]

Type	Art-No	Content [ml]	Mixing nozzles included [pcs]	Shelf life [months]	ETA	€ / pc	[pcs]
VY ECO 300 SF	300VYECOSF	300	2	12	●	12	



Polyester PYSF [styrolfrei]

Type	Art-No	Content [ml]	Mixing nozzles included [pcs]	Shelf life [months]	ETA	€ / pc	[pcs]
PY 165 SF	165PSF	165	2	12	●	1/12	
PY 300 SF	300PSF	300	1	12	●	12	
PY 345 SF	345PSF	345	1	18	●	12	
PY 410 SF	410PYSF	410	1	18	●	12	

Type	Art-No	Length [mm]	Suitable for drill hole Ø [mm]	Suitable for anchor rod	Connecting thread	€ / pc	[pcs]
RBS Ø20 for concrete and masonry	9M20RBK	200	18	M16	M6	5	
Extension for RBS Ø20	MRBKH	–	alle	alle	M6	5	
Handle for RBS Ø20	MRBKV	140	alle	alle	M6	5	
RBK Ø20 for masonry*	9PLRBK	300	20	M16	–	5	
Blow out pump AB	BOP	300	8	–	–	1	

*) not part of the ETA assessments of the ResiFIX injection mortars





Type	Art-No	Outer-Ø [mm]	Length [mm]	€ / pc	[pcs]
MD	9MRMEA	–	215	20	
MDV 10	9MDV	10	200	10	
MDV 10	9500MDV	10	500	10	



Type	Art-No	suitable for ResiFIX type	€ / pc	[pcs]
APP 300	300APP	300 / 165 / 280	1	
APVM	345APVM	345 / 300 / 280 / 165	1	
APP 380	380APP	410	1	

ResiTHERM® 16 technical data

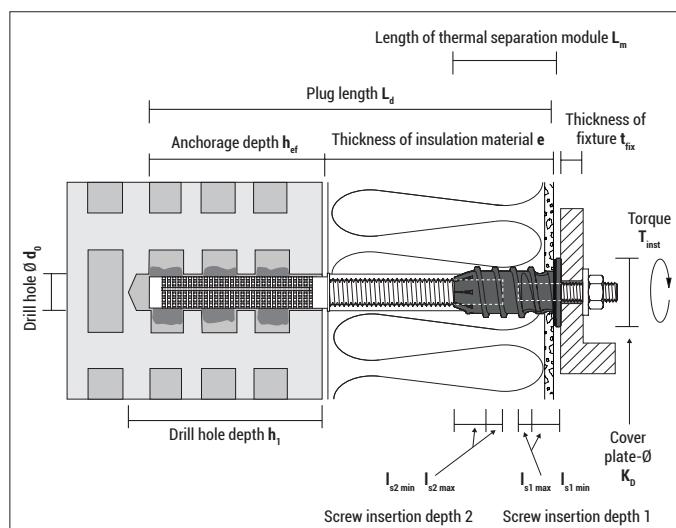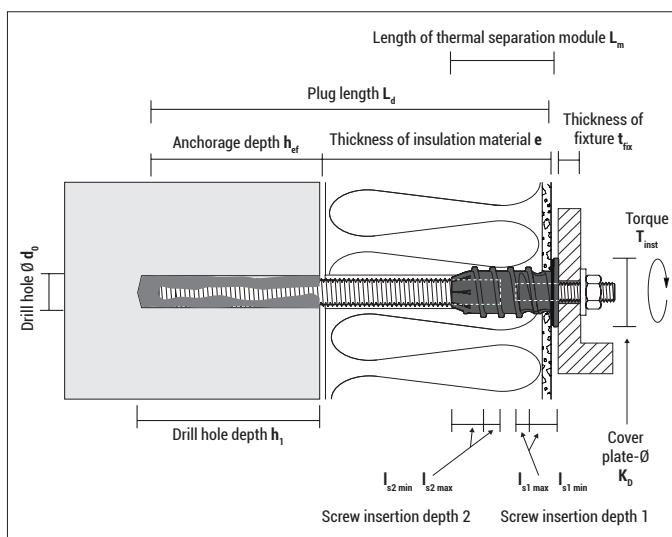

		Installation in concrete		Installation in aerated concrete/solid brick		Installation in perforated brick
Plug length	L_d [mm]	385 ¹⁾		385 ¹⁾		385 ¹⁾
Thickness of insulation material (incl. plaster)	e [mm]	max. 300		max. 280		max. 250
Length of thermal separation module (to lower edge of cover plate)	L_m [mm]	60		60		60
Diameter cover plate	K_D [mm]	42		42		42
Threaded rod	[mm]	M16x350 ¹⁾		M16x350 ¹⁾		M16x350 ¹⁾
Insertion depth of M16 threaded stud	$l_{s2\ min-max}$ [mm]	24-27		24-27		24-27
Drill hole diameter	d_0 [mm]	18		18		20
Drill hole depth	$h_1 \geq$ [mm]	90 + e		110 + e		140 + e
Anchorage depth	h_{ef} [mm]	80		100		130
Plastic sleeve SH		—		—		20/130
Connecting thread	[mm]	M12 ³⁾		M12 ³⁾		M12 ³⁾
Insertion depth of M12 threaded stud	$l_{s1\ min-max}$ [mm]	26-33		26-33		26-33
Thickness of fixture	$t_{fix} \leq$ [mm]	24 ²⁾		24 ²⁾		24 ²⁾
Torque	$T_{inst} \leq$ [Nm]	19 ⁴⁾		19 ⁴⁾		19 ⁴⁾

¹⁾ Threaded rod M16 has to be cut as needed.

For further technical values, see assessment of the ResiFIX injection system used.

²⁾ When using the threaded stud with length L=70 mm. Otherwise, a longer threaded stud or a longer metric screw can be used.

³⁾ Alternative: Threaded stud adapter M12/M10, length 70 mm, stainless steel A4, Art-No X70M12M10ECT4

⁴⁾ Depending on the base material, see ETA of ResiFIX injection mortar.

Permissible tension load and pressure load ResiTHERM® 16¹⁾ at 24°C/40°C²⁾

M16 anchor rod in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320
-----------------------	---	---

Base material	Concrete C20/25 ³⁾		Solid brick MZ 20-2,0 ¹⁾		Hollow brick HLZ 12-1,25 ⁴⁾	
---------------	-------------------------------	--	-------------------------------------	--	--	--

Insulation thickness e	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
60-300 mm	4,29	2,00	2,29	1,86	1,11	0,71

Insulation thickness e	[kN]	[kN]	[kN]	[kN]	[kN]	[kN]
60-300 mm	4,29	2,00	2,29	1,86	1,11	0,71
Min. anchorage depth h_{ef}	80	100	100	130	130	100


¹⁾ Loads include the partial safety factors of the material given in the ETA as well as a partial safety factor for the actions of $\gamma F = 1.4$.

²⁾ For other temperature ranges see ETA-assessment.

³⁾ In full material the tension load resistance can be used also for the pressure load resistance.

⁴⁾ In hollow materials the pressure load resistance can be used also for pressure load resistance, if the setting depth is deep enough to include minimum 4 webs with the injection mortar.

If the setting depth is lower and does not include 4 webs, then the pressure load resistance must be reduced.



Maximum shear loads V¹⁾ at max. 3 or 5 mm displacement if the free outer end of the ResiTHERM® 16 is not freely rotatable (e.g. connected double fixing) at 24°C/40°C²⁾

Not free rotatable anchor rod M16 in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320				
Base material	Concrete C20/25	Solid sand-lime brick KS KS28-2,0	Solid brick MZ 20-2,0	Hollow sand-lime brick KSL 12-1,4	Hollow brick HLZ 12-1,25	Aerated concrete AAC 2

if displacement is 3 mm


Insulation thickness e [mm]	[kN]	[kN]	[kN]	Maximum shear load V [kN]	[kN]	[kN]	[kN]
60	1,57	1,57	1,57	1,53	1,57	1,57	0,89
80	1,57	1,57	1,57	1,53	1,57	1,57	0,89
100	1,57	1,57	1,57	1,53	1,57	1,57	0,89
120	1,47	1,47	1,47	1,47	1,47	1,47	0,89
140	1,20	1,20	1,20	1,20	1,20	1,20	0,89
160	0,92	0,92	0,92	0,92	0,92	0,92	0,89
180	0,64	0,64	0,64	0,64	0,64	0,64	0,64
200	0,57	0,57	0,57	0,57	0,57	0,57	0,57
220	0,49	0,49	0,49	0,49	0,49	0,49	0,49
240	0,41	0,41	0,41	0,41	0,41	0,41	0,41
250	0,37	0,37	0,37	0,37	0,37	0,37	0,37
260	0,33	0,33	0,33	0,33	0,33	0,33	0,33
280	0,26	0,26	0,26	0,26	0,26	0,26	0,26
300	0,18	0,18	0,18	0,18	0,18	0,18	0,18

if displacement is 5 mm

Insulation thickness e [mm]	[kN]	[kN]	[kN]	Maximum shear load V [kN]	[kN]	[kN]	[kN]
60	1,57	1,57	1,57	1,53	1,57	1,57	0,89
80	1,57	1,57	1,57	1,53	1,57	1,57	0,89
100	1,57	1,57	1,57	1,53	1,57	1,57	0,89
120	1,57	1,57	1,57	1,53	1,57	1,57	0,89
140	1,57	1,57	1,57	1,53	1,57	1,57	0,89
160	1,41	1,41	1,41	1,41	1,41	1,41	0,89
180	1,02	1,02	1,02	1,02	1,02	1,02	0,89
200	0,90	0,90	0,90	0,90	0,90	0,90	0,89
220	0,78	0,78	0,78	0,78	0,78	0,78	0,78
240	0,65	0,65	0,65	0,65	0,65	0,65	0,65
250	0,59	0,59	0,59	0,59	0,59	0,59	0,59
260	0,53	0,53	0,53	0,53	0,53	0,53	0,53
280	0,41	0,41	0,41	0,41	0,41	0,41	0,41
300	0,29	0,29	0,29	0,29	0,29	0,29	0,29
Thickness of structural part h_{min}	112	115	115	195	195	240	
Min. edge distance c_{min}	80	60	60	60	50	50	
Min. spacing s_{min}	80	75	65	120	50	50	

¹⁾ Intermediate values can be interpolated/ Values are limited due to the maximum shear load capacity.

²⁾ For other temperature ranges see ETA-assessment.



Maximum shear loads V¹⁾ at max. 3 or 5 mm displacement if the free outer end of the ResiTHERM® 16 is freely rotatable at 24°C/40°C²⁾

Free rotatable anchor rod M16 in 8.8	applied injection mortar ResiFIX VY SF acc. ETA-10/0134	applied injection mortar ResiFIX VY SF acc. ETA-15/0320					
Base material	Concrete C20/25	Solid sand-lime brick KS KS28-20	Solid brick MZ 20-2,0	Hollow sand-lime brick KSL 12-1,4	Hollow brick HLZ 12-1,25	Aerated concrete AAC 2	

if displacement is 3 mm

Insulation thickness e [mm]	[kN]	[kN]	[kN]	Maximum shear load V [kN]	[kN]	[kN]	[kN]
60	1,57	1,57	1,57	1,53	1,57	1,57	0,89
80	1,38	1,38	1,38	1,38	1,38	1,38	0,89
100	1,06	1,06	1,06	1,06	1,06	1,06	0,89
120	0,75	0,75	0,75	0,75	0,75	0,75	0,75
140	0,63	0,63	0,63	0,63	0,63	0,63	0,63
160	0,52	0,52	0,52	0,52	0,52	0,52	0,52
180	0,41	0,41	0,41	0,41	0,41	0,41	0,41
200	0,36	0,36	0,36	0,36	0,36	0,36	0,36
220	0,31	0,31	0,31	0,31	0,31	0,31	0,31
240	0,26	0,26	0,26	0,26	0,26	0,26	0,26
250	0,24	0,24	0,24	0,24	0,24	0,24	0,24
260	0,21	0,21	0,21	0,21	0,21	0,21	0,21
280	0,17	0,17	0,17	0,17	0,17	0,17	0,17
300	0,12	0,12	0,12	0,12	0,12	0,12	0,12

if displacement is 5 mm

Insulation thickness e [mm]	[kN]	[kN]	[kN]	Maximum shear load V [kN]	[kN]	[kN]	[kN]
60	1,57	1,57	1,57	1,53	1,57	1,57	0,89
80	1,57	1,57	1,57	1,57	1,57	1,57	0,89
100	1,57	1,57	1,57	1,57	1,57	1,57	0,89
120	1,19	1,19	1,19	1,19	1,19	1,19	0,89
140	1,00	1,00	1,00	1,00	1,00	1,00	0,89
160	0,82	0,82	0,82	0,82	0,82	0,82	0,82
180	0,64	0,64	0,64	0,64	0,64	0,64	0,64
200	0,56	0,56	0,56	0,56	0,56	0,56	0,56
220	0,49	0,49	0,49	0,49	0,49	0,49	0,49
240	0,42	0,42	0,42	0,42	0,42	0,42	0,42
250	0,38	0,38	0,38	0,38	0,38	0,38	0,38
260	0,34	0,34	0,34	0,34	0,34	0,34	0,34
280	0,27	0,27	0,27	0,27	0,27	0,27	0,27
300	0,19	0,19	0,19	0,19	0,19	0,19	0,19

Thickness of structural part h_{min}	112	115	115	195	195	240
Min. edge distance c_{min}	80	60	60	60	50	50
Min. spacing s_{min}	80	75	65	120	50	50

¹⁾ Intermediate values can be interpolated/ Values are limited due to the maximum shear load capacity.

²⁾ For other temperature ranges see ETA-assessment.